Overview of transducers with 4-20mA output for temperature and humidity

Transducer with 4-20mA output for temperature and humidity

[Transducer Typ P3110E]



Sensor: Interner Sensor

Temperature range: -30 to +80°C

Accuracy: ±0,6°C

Humidity range: 0 to 100%

Accuracy: ±3,0%

Protection class electronics: IP65

Protection class sensor: IP40

Power supply: 9 - 30 VDC

Special feature:

Wirtschaftlich

Preisgünstig

[Transducer Typ T3110]



Sensor: Interner Sensor

Temperaturbereich: -30 to +80°C

Accuracy: ±0,4°C

Humidity range: 0 to 100%

Accuracy: ±2,5%

Protection class electronics: IP65

Protection class sensor: IP40

Power supply: 9-30 VDC

Special feature:

[Transducer Typ T3110Ex]



Sensor: Interner Sensor

Temperaturbereich: -30 to +80°C

Accuracy: ±0,4°C

Humidity range: 0 to 100%

Accuracy: ±2,5%

Protection class electronics: IP65

Protection class sensor: IP40

Power supply: 9-30 VDC

Special feature:

Large display

Large display

ATEX Zertifikat

[Complete Catalog 4-20mA/0-10V converter]

[Complete Catalog 4-20mA/0-10V converter]

[Complete Catalog 4-20mA/0-10V converter]

[Transducer Typ T3111]



Sensor: Externer Sensor

Temperature range:-30 to +105°C

Accuracy: ±0,4°C

Humidity range: 0 to 100%

Accuracy: ±2,5%

Protection class electronics: IP65

Protection class sensor: IP40

Power supply: 9-30 VDC

Special feature:

Large display

externer Sensor (1, 2 oder 4m)

[Transducer Typ T3111Ex]



Sensor: Externer Sensor

Temperature range: -30 to +105°C

Accuracy: ±0,4°C

Humidity range: 0 to 100%

Accuracy: ±2,5%

Protection class electronics: IP65

Protection class sensor: IP40

Power supply: 9-30 VDC

Special feature:

Large display

ATEX Zertifikat

[Transducer Typ T3111P]



Sensor: Externer Sensor

Temperature range: -30 to +105°C

Accuracy: ±0,4°C

Humidity range: 0 to 100%

Accuracy: ±2,5%

Protection class electronics: IP65

Protection class sensor: IP40

Power supply: 9-30 VDC

Special feature:

Ausgelegt to 2,5MPa
Large display

externer Sensor (1, 2 oder 4m)

Sensorlänge: 1, 2 oder 4m

[Complete Catalog 4-20mA/0-10V converter]

[Complete Catalog 4-20mA/0-10V converter]

[Complete Catalog 4-20mA/0-10V converter]

[Transducer Typ T3113D]

[Transducer Typ T3113Ex]

[Transducer Typ T3113]







Sensor: Interner Sensor

Temperaturbereich: -30 to +125°C

Accuracy: ±0,4°C

Humidity range: 0 to 100%

Sensor: Interner Sensor

Temperaturbereich: -30 to +125°C

Accuracy: ±0,4°C

Humidity range: 0 to 100%

Sensor: Interner Sensor

Temperaturbereich: -30 to +125°C

Accuracy: ±0,4°C

Humidity range: 0 to 100%

Accuracy: ±2,5%

Protection class electronics: IP65

Protection class sensor: IP40

Power supply: 9-30 VDC

Special feature:

Large display

[Complete Catalog 4-20mA/0-10V converter]

[Transducer Typ T3117]



Sensor: Interner Sensor

Temperaturbereich: -30 to +125°C

Accuracy: ±0,4°C

Humidity range: 0 to 100%

Accuracy: ±2,5%

Accuracy: ±2,5%

Protection class electronics: IP65

Protection class sensor: IP40

Power supply: 9-30 VDC

Special feature:

Large display

Duct Mount (150mm)

[Complete Catalog 4-20mA/0-10V converter]

[Transducer Typ T3118]



Sensor: Interner Sensor

Temperaturbereich: -10 to +50°C

Accuracy: ±0,5°C

Humidity range: 5 to 95%

Accuracy: ±2,5% to 60% sonst ±3%

Accuracy: ±2,5%

Protection class electronics: IP65

Protection class sensor: IP40

Power supply: 9-30 VDC


Special feature:

Large display

ATEX Zertifikat

[Complete Catalog 4-20mA/0-10V converter]

[Cover / weather station]

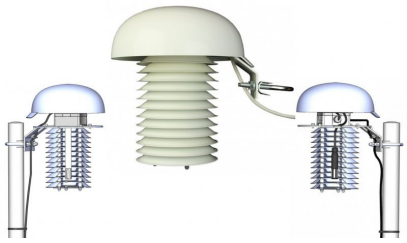

Protective cover for weather sensors

- Universally applicable
- Robust

Protection class electronics: IP65	**Protection class electronics:** IP20	• inexpensive
Protection class sensor: IP40	**Power supply:** 9-30 VDC	
Power supply: 9-30 VDC		
Special feature:	**Special feature:**	
Large display	Large display	
Duct Mount (700mm)		
Complete Catalog 4-20mA/0-10V converter	Complete Catalog 4-20mA/0-10V converter	Protective cover for weather sensors



Opening the Download-Files May require the Adobe-Acrobat-Reader.
Click here to download the Adobe-Acrobat-Reader.

If you have questions please don't hesitate to contact us any time.

Phone +49 (89) 3133007, **Fax** +49 (89) 3146706, wuntronic@wuntronic.de or send us our Contact form

Wuntronic GmbH, Heppstrasse 30, D-80995 Munich, Germany