

Overview of transducers with 4-20mA interface for CO2

Transducers with 4-20mA interface for CO2

[Transducer Typ T5141](#)

[Transducer Typ T5145](#)

[Transducer Typ T5140](#)



Sensor: Intern

Temperature range: -30 to +60°C

CO2 measurement range: 0 to 2000ppm

Accuracy: ±50ppm

Protection class electronics: IP30

Power supply: 9 - 30 VDC

Special feature:

Large display



Sensor: Extern

Temperature range: -30 to +60°C

CO2 measurement range: 0 to 10000ppm

Accuracy: ±100ppm

Protection class electronics: IP65

Power supply: 9 - 30 VDC

Special feature:

Large display



Sensor: Intern

Temperature range: -30 to +60°C

CO2 measurement range: 0 to 2000ppm

Accuracy: ±50ppm

Feuchtebereich: 5 to 95%RV

Druckbereich: 850 to 1100hPa

Protection class electronics: IP65

Schutzklasse Sensor: IP20

Power supply: 9 - 30 VDC

Special feature:

Sensorlänge: 1, 2, 4 oder 10m

Large display


Duct Mount Sensor (150mm)

[Complete Catalog 4-20mA/0-10V
Converter](#)

[Complete Catalog 4-20mA/0-10V
Converter](#)

[Complete Catalog 4-20mA/0-10V
Converter](#)

[Cover / weather station](#)

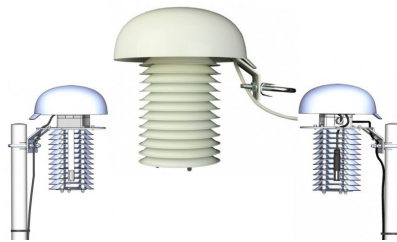

Protective cover for weather sensors

- Universally applicable
- Robust
- Inexpensive

[Protective cover for weather
sensors](#)



Für das Betrachten der Download-Dateien benötigen Sie i. R. den Adobe-Acrobat-Reader.
[Sie können diesen hier herunterladen.](#)

Für offene Fragen stehen wir jederzeit gerne zur Verfügung.

Telefon +49 (89) 3133007, **Fax** +49 (89) 3146706, wuntronic@wuntronic.de oder senden Sie uns eine [Kontaktanfrage](#)

WUNTRONIC GmbH, Heppstrasse 30, D-80995 München, Deutschland