Overview of transducers with 0-10V output for temperature, humidity, CO2 and pressure

0-10 V Transducers for Temperature, Humidity, Pressure and CO2

[Transducer type P0210]



Sensor: Internal Sensor

Temperature range: -30 to +80°C

Genauigkeit: ±0,4°C


Protection class electronics: IP65

Power supply: 15 - 30 VDC

[General Catalog 4-20mA/0-10V converter]

[Transducer type T0218]

[Transducer type P0212]

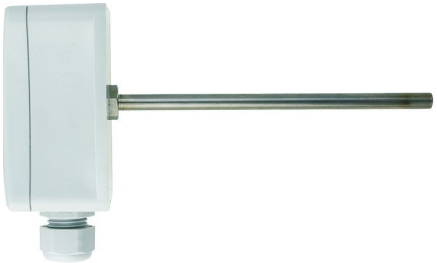

Sensor: Internal Sensor

Temperature range: -30 to +80°C

Genauigkeit: ±0,4°C

Protection class electronics: IP65

Power supply: 15 - 30 VDC

Special feature:

Duct Mount (150mm)

[General Catalog 4-20mA/0-10V converter]

[Transducer type T4211]

[Transducer type P4211]



Sensor: Extern Pt1000/3850ppm

Temperature range: Sens abhg.

Genauigkeit: ±0,15°C

Protection class electronics: IP65

Power supply: 15 - 30 VDC

Special feature:
externer Sensor

[General Catalog 4-20mA/0-10V converter]

[Cover / weather station]



Sensor: Intern

Temperature range: -10 to +50°C

Genauigkeit: ±0,5°C

Protection class electronics: IP20

Power supply: 15-30 VDC

Special feature:

Large display

Room monitoring

[General Catalog 4-20mA/0-10V converter]



Sensor: Ext. Pt1000 Sensor

Temperature range: -200 to +600°C

Genauigkeit: ±0,15°C

Protection class electronics: IP65


Power supply: 15-30 VDC

Special feature:

Large display

Ext. Pt1000 Sensor

[General Catalog 4-20mA/0-10V converter]

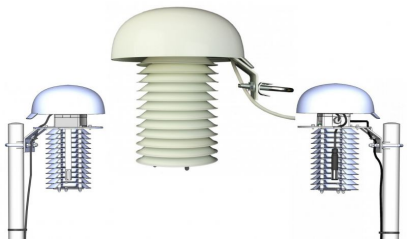

Protective cover for weather sensors

- Universally applicable
- Robust
- Inexpansive

[Schutzabdeckung für Wettersensoren]

Opening the Download-Files May require the Adobe-Acrobat-Reader.
[Click here to download the Adobe-Acrobat-Reader.]

If you have questions please don't hesitate to contact us any time.

Phone +49 (89) 3133007, **Fax** +49 (89) 3146706, wuntronic@wuntronic.de or send us our Contact form

Wuntronic GmbH, Heppstrasse 30, D-80995 Munich, Germany